


**MF 4400**



**Versatile, multi-purpose tractors**

3 models: 74, 88 and 98 hp



**MASSEY FERGUSON**

## Rugged simplicity for cost-effective productivity

Sometimes the right business solution is surprisingly simple. If you don't need the complexity of many modern tractors, why pay for it? The new Massey Ferguson 4400 series is a range of versatile, no-nonsense tractors, designed to give years of cost-effective, high productivity.

But possibly more importantly, they are designed to be easy to operate, easy to service and easier on your farm - or local authority budget.

### The new range:

Model	Engine	Capacity	ISO hp <sup>1</sup>
MF 4435-2/4WD	3 Cyl. Turbo	3.3 litre	74
MF 4445-2/4WD	4 Cyl. Turbo	4.4 litre	88
MF 4455-2/4WD	4 Cyl. Turbo	4.4 litre	98

<sup>1</sup>ISO TR14396

### Simple efficiency

From the moment you climb aboard the MF 4400 through the wide-opening cab doors, it's obvious that this is a tractor that means business.

The simple mechanical gear selection is precise and positive, with no complex linkages to worry about. This goes for the left-hand shuttle lever too.

Look ahead, and you'll see that the slim instrument console affords excellent visibility ahead and down into the furrow. Large rear view and internal mirrors plus narrow cab pillars complete the picture of excellent all-round visibility.

### Power and economy

The superb Sisu Diesel engines offer smooth, quiet power with plenty of torque back-up. This gives more efficient PTO operation and easier driving, requiring fewer gear changes in a wide range of operating conditions.

The engines also provide outstanding fuel economy, helped by the tractors' excellent balance and weight distribution; efficient weight transfer and low power losses through the simple mechanical driveline.

**Right: The sturdy 3-point linkage uses top link sensing, giving excellent draft signal response**

### Linkage and hydraulics

A readily accessible, externally-mounted dual pump provides up to 55 litres of oil flow at high pressure, to tackle most day-to-day tasks. The rugged linkage, with its top link sensing draft control system, provides exceptional ground contour following and traction for top class work quality. Control is really simple too, with mechanical levers providing fast, accurate linkage adjustment.


With an independent oil reservoir and dual filters for the hydraulic system, oil contamination is minimised, reducing servicing costs.



Access to engine service points and battery is good - even with a front loader fitted

Spacious, flat-floor cab, excellent visibility and well-placed, simple controls make driving the MF 4400 enjoyable and rewarding



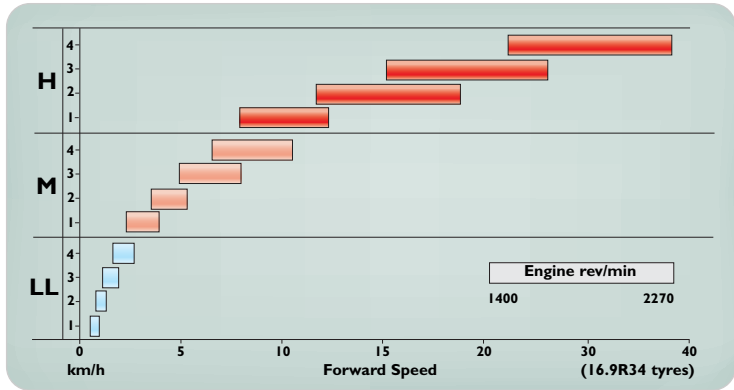

**Specifications:** ● = Standard ○ = Optional – = Not applicable/available

		MF 4435	MF 4445	MF 4455
<b>Engine power</b>				
@ 2270 rev/min	* ISO hp (kW)	74 (54)	88 (65)	98 (72)
Max. torque @ rev/min	* Nm	296/1400	324/1400	359/1400
* ISO TR14396				
<b>Engine</b>				
Turbocharged, water cooled,	make	Sisu Diesel	Sisu Diesel	Sisu Diesel
direct injection diesel	type	33DT	44DT	44DT
Capacity	litre	3.3	4.4	4.4
<b>Transmission</b>				
12 forward, 12 reverse speed synchro sideshift gearbox with left-hand mechanical shuttle. Includes 'creep' gear down to 0.6 km/h at PTO speed.				
Forward speed range	km/h	0.9–40	0.9–40	0.9–40
<b>Linkage and hydraulics</b>				
3-point linkage	Top link sensing, Cat.2 linkage with telescopic ball ends			
Linkage control	Mechanical, with draft, position and drop-speed control			
Max. oil flow	litre/min	55	55	55
Maximum lift capacity	kg ●/○	2900 / 3300	3300 / –	3300 / –
Front linkage and PTO		○	○	○
<b>Power take-off</b>				
540/540E (750) @ rev/min	●	1890/1594 (2214)	1890/1594 (2214)	1890/1594 (2214)
540/1000 @ rev/min	○	1890/2074	1890/2074	1890/2074
<b>'Standard' wheels and tyres</b> (A range of wheels and tyres is available, please consult your Dealer)				
Front - 2WD		10.00-16	10.00-16	10.00-16
- 4WD		13.6R24	13.6R24	13.6R24
Rear		16.9R34	16.9R34	16.9R34
<b>Standard equipment includes:</b> Flat floor cab, analogue instrument panel, vertical centre exhaust, tinted glass, opening side and rear windows, cab heater, adjustable spring suspension seat, passenger seat, 2 spool valves, 2 rear work lights, aerial and speakers.				
<b>Variable equipment includes:</b> Low Profile cab, air conditioning, pneumatic seat with armrests, rear screen wash/wipe, 2 front work lights, radio cassette player, roof-mounted beacon.				
<b>Weights and dimensions</b> (approximate, 'standard' wheels and tyres, with fuel)				
Weight - 2/4WD	kg	3210 / 3440	3330 / 3560	3360 / 3590
Length, links horizontal - 2/4WD	m	3.75 / 3.86	3.88 / 4.04	3.88 / 4.04
Width, minimum	m	2.14	2.18	2.18
Height, over std./low profile cab	m	2.66 / 2.51	2.70 / 2.54	2.70 / 2.54
Wheelbase - 2/4WD	m	2.11 / 2.26	2.24 / 2.39	2.24 / 2.39
Fuel tank capacity	litre ●/○	70 / 95	70 / 95	70 / 95



Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your Massey Ferguson Dealer or Distributor prior to any purchase.

[www.masseyferguson.com](http://www.masseyferguson.com)



MASSEY FERGUSON is a worldwide brand of AGCO Corporation  
© AGCO Limited. 2004 | A-English/1104/10m | 13337/1104/60m

